

AC controller for residential and office applications – KLR-E 7034



KLR-E 7034


Characteristics

	KLR-E 7034
Switches	Mains ON/OFF Fan speed high/med/low Heat/Fan/Cool
Outputs	Heat Cool Fan speed high/med/low
Indication lamps	Heat Cool Mains ON/OFF

Technical data

Type	KLR-E 7034
Article no.	111 7734 51 100
Operating Voltage	AC 230 V/50/60 Hz
Switching current	6 A $\cos\varphi = 1$ / 3 A $\cos\varphi = 0,6$
Contact configuration	SPDT
Temperature range	5 to 30°C
Hysteresis	~ 0,5 K
Temperature sensor	Bimetall
Housing protection	IP 30/isolated

Wiring diagram

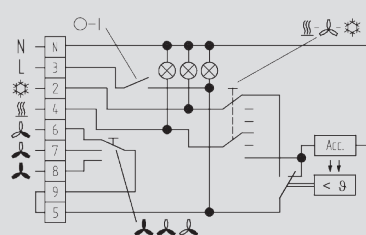

KLR-E 7034